

LZD-T6-12W/24W 12W/24W Power Adapter
LZD-T6-12W/24W 12W/24W 系列电源适配器

应用 Applicator

SUITABLE FOR INDOOR USE
适用于室内使用

产品证书 Certificate




特点 Features

- ★ 支持国家及规格：中规、美规，欧规，印度规 韩规，英规
- ★ 能承受 1000VAC 浪涌
- ★ 工作温度高达 55 °C
- ★ 承受 5G 振动测试。
- ★ 长达 2 年固件质保，值得信赖。
- ★ 保护种类：短路/过载/过电压/过温度
- ★ 高效率全部使用 105 °C 长寿命电解电容
- ★ 外壳采用 PC 阻燃，材料全部达到 RHOS 标准
- ★ 此款支持充电涡流恒流恒压模式，有线补功能
- ★ Supports: US/EU/UK/AU
- ★ Capable of withstanding 1000VAC surges
- ★ Working temperature up to 55 °C
- ★ withstand 5G vibration test.
- ★ Up to 2 years of firmware warranty, trustworthy.
- ★ Protection type: short circuit/overload/overvoltage/over temperature
- ★ High efficiency All use 105 °C long-life electrolytic capacitor
- ★ The shell adopts PC flame retardant, and all materials meet RHOS standards
- ★ This model supports charging eddy current constant current constant voltage mode, with wired compensation function



Mach.outline Drawing 产品结构尺寸

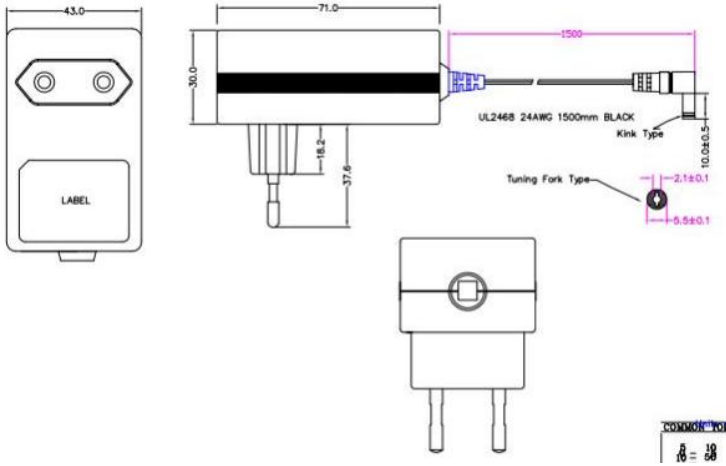

| Environment and size 环境与尺寸 | |
|----------------------------------|---------------|
| Working temperature 工作温度 | - 3 5°C~+55°C |
| Storage temperature 储存温度 | - 40°C~+85°C |
| Working Relative Humidity 相对工作湿度 | 5%-95% |
| Storage Relative Humidity 储存相对湿度 | 10 % - 100 % |

| Electrical Features 电性能 | | |
|-------------------------|---------------------|--|
| Input Voltage 输入电压 | AC100~240V | |
| Input frequency 输入频率 | 50/60Hz | |
| In-rush current 浪涌电流 | 冷启动: 230V60A | |
| Power factor 功率因数 | 0.6 | |
| Ripple & Noise 纹波&噪声 | 输出电压1%(MAX) | |
| Protection 保护 | O LP, SCP, OVP, OTP | |
| Lifetime 寿命 | > 2 Years | |

| Model 型号 | Output power 输出功率 (W) | Output voltage 支持电压 (V) | Output current 输出电流 (A) | Outline size 外形尺寸 (MM) | Efficiency 效率 | Safe approval 安规认证 |
|----------------|-----------------------|-------------------------|-------------------------|------------------------|---------------|------------------------------|
| LZD-T6-12W-5V | 12W (MAX) | DC: 5V | 2.0A (MAX) | 71*43*30 | 85~92% | CCC,GS,CE, ETL, BIS,UKCA,SAA |
| LZD-T6-12W-12V | 12W (MAX) | DC:12V | 1.0A (MAX) | 71*43*30 | 85~92% | CCC,GS,CE, ETL, BIS,UKCA,SAA |
| LZD-T6-12W-24V | 12W (MAX) | DC: 24V | 0.5A (MAX) | 71*43*30 | 85~92% | CCC,GS,CE, ETL, BIS,UKCA,SAA |
| LZD-T6-24W-12V | 24W (MAX) | DC: 12V | 2.0A (MAX) | 71*43*30 | 85~92% | CCC,GS,CE, ETL, BIS,UKCA,SAA |
| LZD-T6-24W-24V | 24W (MAX) | DC: 24V | 1.0A (MAX) | 71*43*30 | 85~92% | CCC,CE, BIS,UKCA,SAA |
| LZD-T6-24W-36V | 24W (MAX) | DC: 36V | 0.5A (MAX) | 71*43*30 | 85~92% | CCC,CE, BIS,UKCA,SAA |