

USB 充电器系列 USB CHARGER SERIES

A37 5W/10W USB CHARGER
A37 5W/10W USB 充电器

应用 Applicator

SUITABLE FOR INDOOR USE
适用于室内使用

产品证书 Certificate




特点 Features

- ★ 支持国家及规格：澳规、中规、美规，欧规，印度规韩规，英规，支持多色，目前黑色/白色
 - ★ 能承受 1000VAC 浪涌
 - ★ 工作温度高达 55 ° C
 - ★ 承受 5G 振动测试。
 - ★ 长达 2 年固件质保，值得信赖。
 - ★ 保护种类：短路/过载/过电压/过温度
 - ★ 高效率全部使用 105 ° C 长寿命电解电容
 - ★ 外壳采用 PC 阻燃，材料全部达到 RHOS 标准
- ★ Supports: SAA/S/EU/UK/AU/CCC supports multiple colors, currently black/white
 - ★ Capable of withstanding 1000VAC surges
 - ★ Working temperature up to 55 ° C
 - ★ withstand 5G vibration test.
 - ★ Up to 2 years of firmware warranty, trustworthy.
 - ★ Protection type: short circuit/overload/overvoltage/over temperature
 - ★ High efficiency All use 105 ° C long-life electrolytic capacitor
 - ★ The shell adopts PC flame retardant, and all materials meet RHOS standards



Mach.outline Drawing 产品结构尺寸

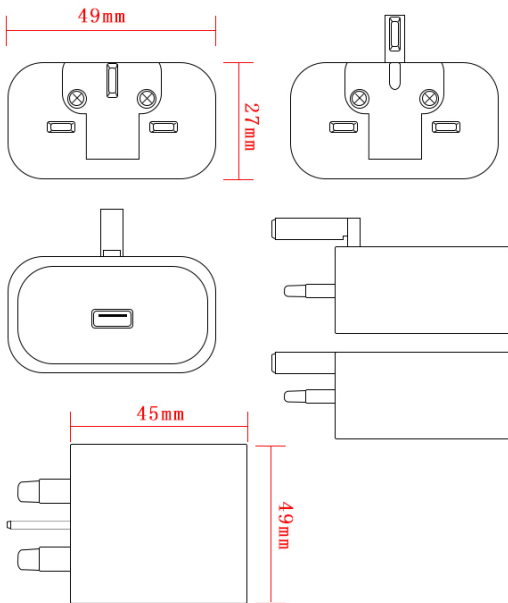

Environment and size 环境与尺寸	
Working temperature 工作温度	- 3 5°C~+55°C
Storage temperature 储存温度	- 40°C~+85°C
Working Relative Humidity 相对工作湿度	5%-95%
Storage Relative Humidity 储存相对湿度	10 % - 100 %

Electrical Features 电性能	
Input Voltage 输入电压	AC100~240V
Input frequency 输入频率	50/60Hz
In-rush current 浪涌电流	冷启动: 230V60A
Power factor 功率因数	0.3
Ripple & Noise 纹波&噪声	输出电压1%(MAX)
Protection 保护	OLP,SCP,OVP,OTP
Lifetime 寿命	> 2 Years

Model & Key parameters 型号及关键参数

Model 型号	Output power 输出功率 (W)	Support voltage 支持电压 (V)	Output current 输出电流 (A)	Outline size 外形尺寸 (MM)	Efficiency 效率	Safe approval 安规认证
A37-5W-5V1A	5W (MAX)	DC: 5V	1.0A (MAX)	49*27*45mm	85~92%	CCC,PSE,ETL,CE,KC
A37-10W-5V2A	10W (MAX)	DC: 5V	2.0A (MAX)	49*27*45mm	85~92%	CCC,PSE,ETL,CE,KC